

Charging Cable & U-Hook

Clean. Durable. Tailored to you.
The perfect match for your Easee setup.



Create your optimal charging experience

Complete your Easee installation with the stylish U-Hook and durable charging cable. Designed to keep your charging area neat and protected, the U-Hook is available in stainless steel, three color finishes, and a hand-polished mirror version.

Our high-quality, weather-resistant charging cable comes in multiple models, supporting all AC charging up to 3-phase 22 kW (32A). With its sleek design and robust build, it blends seamlessly with your charger and is designed for permanent outdoor use in all weather.

Together, they deliver a complete, premium charging setup that looks as good as it performs.

Charging cable

- Compatible with all Type 2 electric vehicles
- Available in 7.4 kW, 11 kW, and 22 kW. Tailored to your charging needs
- Silver-plated contacts ensure stable and efficient charging
- Certified to the highest safety and quality standards
- Comfortable to handle with ergonomic grip and durable design
- Weather-resistant and built to perform in all conditions
- Trusted German quality. Engineered in collaboration with Phoenix Contact



U-Hook

- Stylish and elegant cable holder
- Convenient organizer for the charging cable
- Robust and durable, made of stainless steel
- Available in three different colors, with a scratch-resistant powder coating, and in a hand-polished mirror finish
- Easy to install, difficult to steal
- Designed in Norway



Cable variants



Available in 4 types
with max charging power

7.4 kW
Cable: 5m.

11 kW
Cable: 5m.

22 kW
Cable: 4m.

22 kW
Cable: 7,5m.

By offering multiple different high quality charging cables we enable you to choose the perfect cable for your charging habits and budget. You get the daily convenience of a lighter, more affordable cable or the confidence of maximum speed, ensuring you only invest in the performance that truly matters to you.

Key features

- Built for both home and public charging
- Sleek and durable design for everyday use
- Weather-resistant with IP44/IP54 rating
- Ergonomic, award-winning handle for comfort
- Longitudinal water tightness prevents ingress
- Engineered by Phoenix Contact, Germany


Technical

Max charging power	7.4 kW	11 kW	22 kW	22 kW
Cable length	5m.	5m.	4m.	7,5m.
Color	Black	Black	Black	Black
Product no	90207	90208	90200	90201
GTIN/EAN	4067923489943	4067923496101	7090052310571	4055626944388
Phases	1-Phase	3-Phase	3-Phase	3-Phase
Charging current	32A	20A	32A	32A
Rated voltage	250 V AC	480 V AC	480 V AC	480 V AC
Charging mode	Mode 3, Case B	Mode 3, Case B	Mode 3, Case B	Mode 3, Case B
Connector type	Type-2 to Type-2	Type-2 to Type-2	Type-2 to Type-2	Type-2 to Type-2
IP rating (with cap)	IP44 / IP54	IP44 / IP54	IP44 / IP54	IP44 / IP54
Standard	IEC 62196-2	IEC 62196-2	IEC 62196-2	IEC 62196-2
Resistor coding (PP-PE)	220Ω	680Ω	220Ω	220Ω
Altitude*	max. 5000 m	max. 5000 m	max. 5000 m	max. 5000 m
Operating temperature	-40C to +50C	-40C to +50C	-40C to +50C	-40C to +50C
Manufacturing warranty**	2 years	2 years	2 years	2 years
Cable structure	3 x 6.00mm ² + 1 x 0.5 mm ²	5 x 1.5 mm ² + 1 x 0.5 mm ²	5 x 6.00mm ² + 1 x 0.5 mm ²	5 x 6.00mm ² + 1 x 0.5 mm ²


*Above sea level
**Covers material and manufacturing defects under normal use. In accordance with Easee’s warranty procedure

Cable dimensions


Measurement
in mm

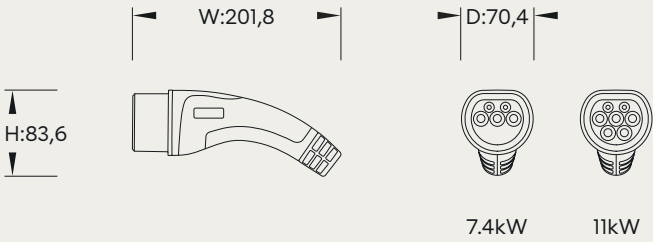

Vehicle charging
connectors


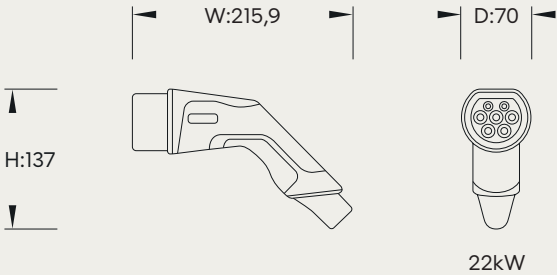


Vehicle charging
connector


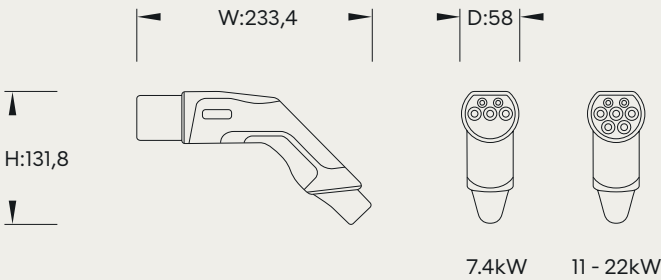


Infrastructure
connectors

Connection
diagrams




Vehicle charging
connectors



Infrastructure
charging plugs

U-Hook

Measurement
in mm

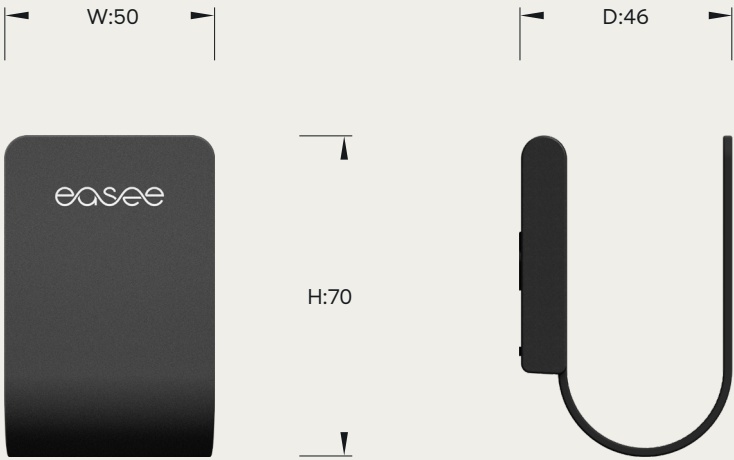

Technical


U-Hook Premium

Dimension (mm): H: 70 x W: 50 x D: 46
Weight: 135 g
Material: 316 corrosion-resistant stainless steel
Finish: Hand-polished mirror finish
Screws included


U-Hook Colours

Dimension (mm): H: 70 x W: 50 x D: 46
Weight: 135 g
Material: 304 stainless steel
Finish: Scratch-resistant powder coating
Screws included

Easee U-hook
contains




U-Hook



Bracket

Colours



The information in this document is for information purposes only, is provided as is, and may be subject to change without notice. Easee Production & Sales Nordics AS including its subsidiaries does not accept any liability for the correctness or completeness of the information and illustrations, and is not liable or responsible for your considerations, assessments, decisions or absence of such, or other use of the information in this document.

No part of this publication may be re-published, reproduced, transmitted or re-used in any other form, by any means or in any form, for your own or any third-party's use, unless otherwise agreed with Easee or its subsidiaries in writing. Any permitted use shall always be done in accordance with good practice and ensure that no harm may be caused to Easee or by misleading the consumer.

Easee and Easee products, product names, trademarks and slogans, whether registered or not, are Easee's intellectual property and may not be used without Easee's prior written permission. All other products and services mentioned may be trademarks or service marks of their respective owners.

The latest version of this publication can be downloaded at <http://easee.support>

August 2025 - Version 2.01
© 2025 by Easee Production & Sales Nordics AS.
All rights reserved.



Easee Production & Sales Nordics AS
Vassbotnen 23
4033 Stavanger, Norway
Org.nr: 920 292 046

Easee is distributed and maintained by a network of qualified partners and resellers. Find more information and your local partner at:

www.easee.com